


The Xtinguish Advantage list:



Applications

- Plant Rooms
- Control Rooms
- Electrical Sub-Stations
- Computer Rooms
- Server Rooms
- Data Centers
- Electrical Panels & Cabinets
- Marine Vessels
- Telecommunications
- Raised Floors
- Suspended Ceilings
- Motor Vehicles
- Electrical Rooms

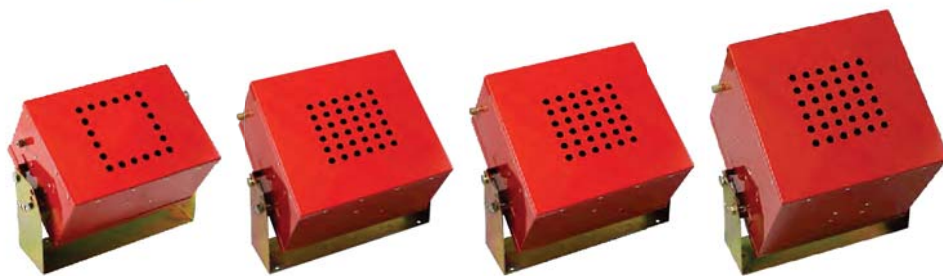

PROPERTY

- 10 Times More Effective Than Halon
- 60 Times More Effective Than CO2
- Non-Corrosive, Non-Conductive

SAFE

- Non-Toxic
- Life Sustaining (No Oxygen Depletion)
- Non-Pressurized
- Fail Safe
- Fully Automatic
- Suitable for Class A, B and C Fires
- Extremely Fast Extinguishing

ECOLOGICAL

- Zero Ozone Depleting Potential
- Zero Global Warming Potential
- Negligible Atmospheric Lifetime
- EPA SNAP Listed and Green Listing

ECONOMICAL

- Minimizes Consequential Damage
- No Mechanical Installation
- Simple Installation
- Reduced Maintenance
- Substantial Cost Savings Over Other Agents
- UL Listed for 10 Years Shelf Life

X T I N G U I S H

FirePro® X T I N G U I S H

FirePro® Xtinguish is an exciting and new “green” fire suppression product for total-flooding applications or any installation where a fire suppression system is needed to protect the contents of a space. FirePro® Xtinguish is non-toxic, with zero ozone depletion and global warming potential. It utilizes an aerosol-forming solid compound to extinguish fires by inhibiting the chemical chain reactions within the fire itself, breaking the chemical reaction of fire cleanly and efficiently. While being very powerful, the FirePro® Xtinguish system installation is uncomplicated and maintenance is minimal. FirePro® Xtinguish and the HCVR-3 Releasing Fire Alarm Control Panel combine to produce a perfect extinguishing solution for offices, data centers, server rooms, warehouses, archives, banks, transformer/electrical rooms, and more.



CLASSES OF FIRE:



- UL 2775 Listed for Class A, B, C fires
- Environmentally friendly (Green Label)
- Available in 10 models
- EPA listed
- UL Listed service life = 10 years
- Easy installation, requires no piping or pressurized bottles
- Minimal maintenance
- Requires far less real estate compared to a typical pressurized bottle-type system
- Minimal cleanup after discharge
- Safe to handle
- Mounting brackets included for all models
- Compatible with the HCVR-3 Releasing Fire Alarm Control Panel



MODELS

Canister Types	FNX-20S	FNX-40S	FNX-80S	FNX-100S	FNX-200S	FNX-500S
Mass of SBK	20g	40g	80g	100g	200g	500g
Weight	0.6 lbs (310g)	1.3 lbs (610g)	1.9 lbs (870g)	3.0 lbs (1370g)	4.0 lbs (1840g)	7.3 lbs (3340g)
Dimension	6.4"H x 1.2"D (165mm x 32mm)	5.5"H x 2.0"D (140mm x 51mm)	7.2"H x 2.0"D (185mm x 51mm)	6.1"H x 3.4"D (155mm x 84mm)	7.2"H x 3.4"D (185mm x 84mm)	11.6"H x 3.4"D (295mm x 84mm)

Box Types	FNX-1200	FNX-2000	FNX-3000	FNX-5700
Mass of SBK	1200g	2000g	3000g	5700g
Weight	24.0 lbs (10900g)	34.17 lbs (15500g)	35.9 lbs (16300g)	58.2 lbs (26400g)
Dimension	6.5"H x 11.8"L x 8.5"W (167mm x 300mm x 216mm)	7.2"H x 11.8"L x 11.8"W (185mm x 300mm x 300mm)	7.2"H x 11.8"L x 11.8"W (185mm x 300mm x 300mm)	11.8"H x 11.8"L x 11.8"W (300mm x 300mm x 300mm)

Conventional extinguishing agents employ oxygen depletion, cooling or both to extinguish a fire. FirePro® Xtinguish inhibits the chain chemical reactions present in fire. By removing the flame free radicals, it extinguishes fire without depleting oxygen.

